




АКСЕССУАРЫ

Термоизоляционный
универсальный люк






Термоизоляционный
универсальный люк

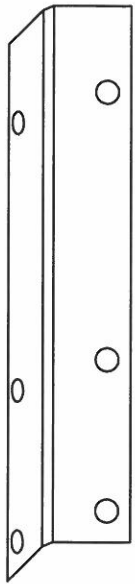

A (4x)




H (1x) M6 x 100




J (1x)




L (1x) M 8

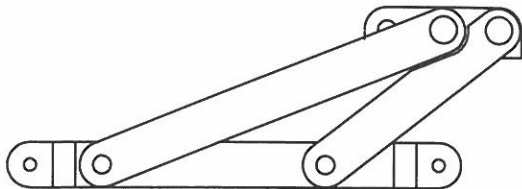


N (1x)

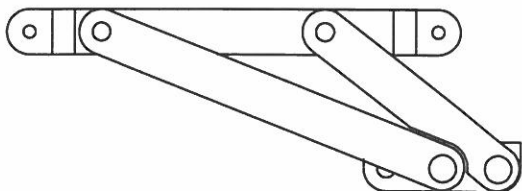


Q (1x)




S (1x)



T (1x)



U (2x)



V (2x)




B (38x) M5 x 27



C (38x) M5



D (2x) M5



E (1x) M8 x 60



F (2x) M8



F1(1x) M8



G (5x) M8



G1(5x) M8



I (1x) M8 x 30



K (2x) 5 x 40




M (4x) 5 x 35




O (4x) 4 x 16



P (1x)



R (4x)

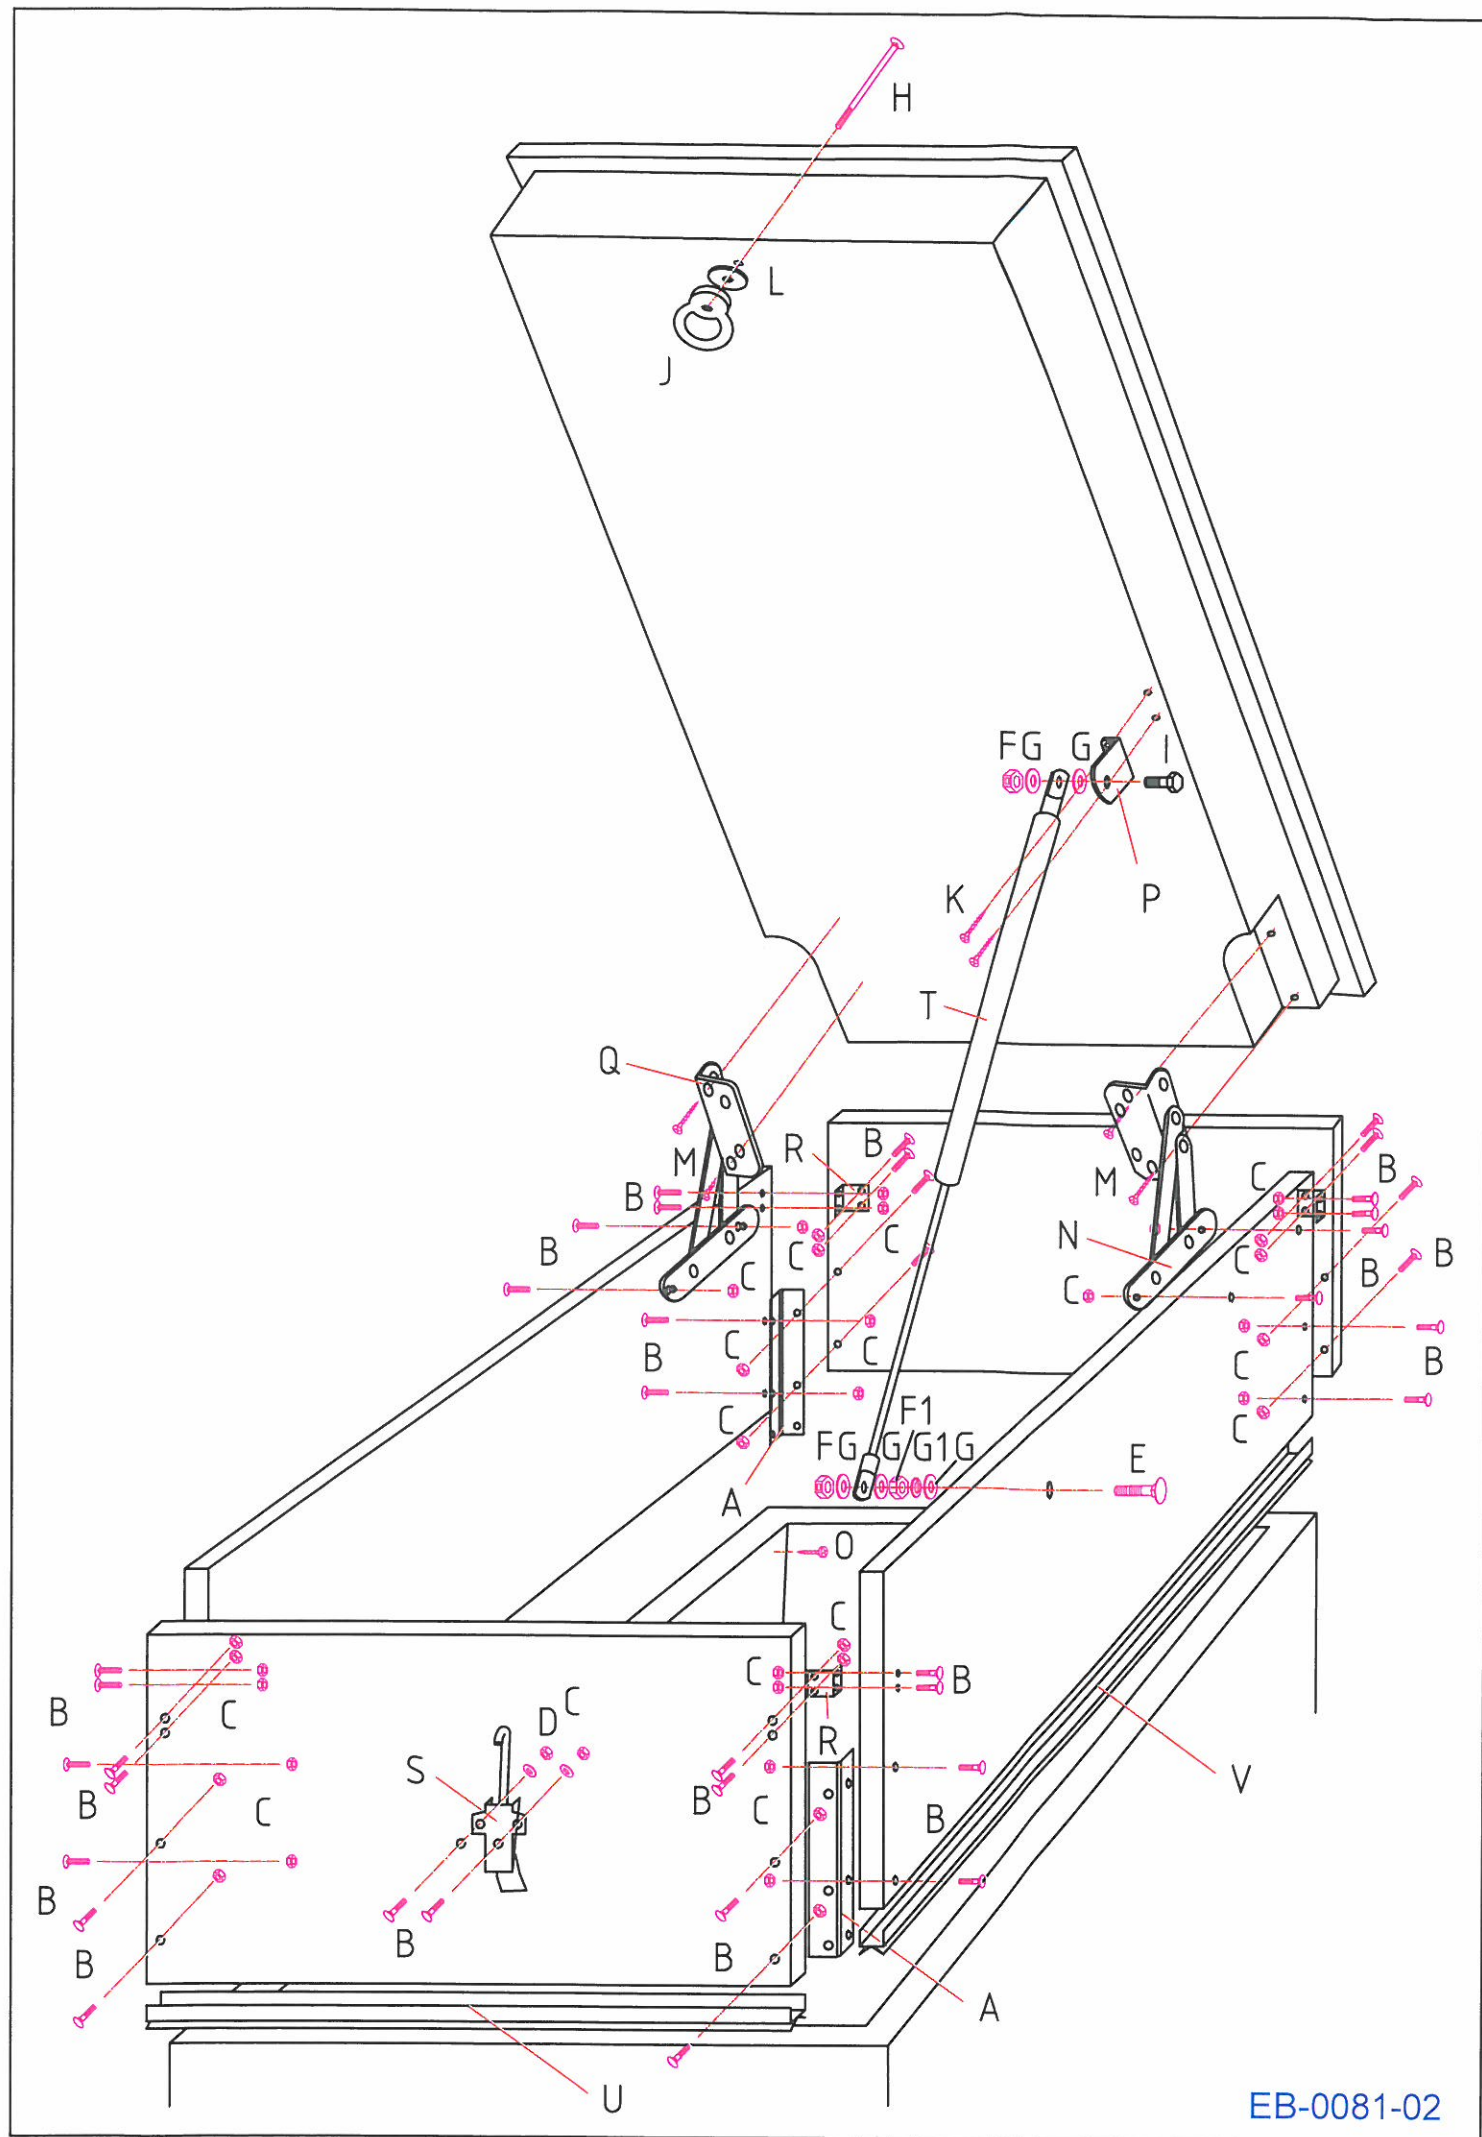



Managementsystem

Technisches Datenblatt: Zargenrahmen und Deckel

Gültig

von: 20.04.06

bis:

Norm und Maß

Rohbaumaß Norm L+B	lichte RH in cm	Futterkasten Norm in cm	Rohbaumaß Maß Länge	Rohbaumaß Maß Breite	Futterkasten Maß in cm	Futterkasten Maß in cm
70 x 70	360 470	69 x 69 x 7	70 – 150	60 - 90	69 – 149 x 7	59 – 89 x 7
60 x 100	360 470	69 x 99 x 7				

